


- LIGHT FIXTURE RETROFIT NOTES:**
1. DISCONNECT ELECTRICAL CONNECTION TO EXISTING LIGHT FIXTURES AND CAREFULLY REMOVE LIGHT FIXTURE FROM WALL;
  2. DOCUMENT EXISTING CONDITION OF LIGHT FIXTURE AND INDIVIDUAL LOCATIONS PRIOR TO REMOVAL;
  3. PROVIDE A WRITTEN DESCRIPTION OR PLAN DETAILING THE METHOD TO BE USED FOR DISCONNECTION/DISMOUNT, TRANSPORTING AND REMOVAL OF UNITS AT THEIR EXISTING LOCATIONS, INCLUDING ANCHORING DEVICES, TOOLS, CATALOGUING METHODOLOGY AND TEMPORARY PROTECTION;
  4. AT A MINIMUM, THE LIGHT FIXTURES SHALL BE INDIVIDUALLY CRATED, PROTECTED AND TRANSPORTED;
  5. CLEAN FIXTURES, LEAVING EXISTING PATINA INTACT. REPLACE ANY MISSING HARDWARE AND BROKEN GLASS, REPAIR OPEN SEAMS.
  6. REWIRE FIXTURES TO ACCOMMODATE TWO OF 42W LAMPS WITH BATTERY BACK-UP. FOR WIRING, LAMPS AND BALLAST REFER TO ELECTRICAL DRAWINGS AND SPECIFICATIONS.
  7. COORDINATE DISMOUNT AND REMOVAL OF FIXTURE WITH ELECTRICAL SCOPE OF WORK;
  8. CAREFULLY REINSTALL LIGHT FIXTURES AT THEIR ORIGINAL LOCATION USING BRASS/COPPER ANCHORS SET IN EPOXY INTO MASONRY, MIN. 4" EMBEDMENT.

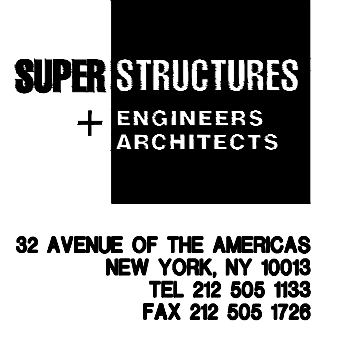


**MAIN BUILDING EAST ELEVATION - A**

**ELEVATION RESTORATION SCHEDULE**

ID CODE	DETERIORATION ITEM	UNIT	SYMBOL	DRAWING
CLN 01	MASONRY SURFACE STAIN REMOVAL	SF	[Symbol]	SPEC. 4510
CON 01	CONCRETE COLUMN ENCASEMENT REPAIR	LI	[Symbol]	A312
CON 02	CONCRETE SPALL REPAIR	SI	[Symbol]	A312
CON 03	CONCRETE SHALLOW SPALL REPAIR	LI	[Symbol]	A312
CON 04	CONCRETE BEAM ENCASEMENT REPAIR	LF	[Symbol]	A312
CON 06	CONCRETE CRACK REPAIR	LF	[Symbol]	A312
COR 01	BRICK MASONRY CORNER RECONSTRUCTION	SF	[Symbol]	A313
CUP 01	AUDITORIUM CUPOLA REPLACEMENT	EA	[Symbol]	A409
DOR 01	DOOR REPLACEMENT	EA	[Symbol]	A910
FAS 01	CLASSROOM BUILDING FASCIA REPLACEMENT	LF	[Symbol]	A406
JNT 01	TYPICAL EXPANSION JOINT	LF	[Symbol]	A301
JNT 02	SEALANT JOINT REPLACEMENT AT WINDOW PERIMETER	LF	[Symbol]	A301
JNT 03	SILL POINTING & SEALANT REPLACEMENT	LF	[Symbol]	A301
JNT 04	LED CAP INSTALLATION AT SKY JOINTS	LF	[Symbol]	A309
LTL 01	STEEL LINTEL REPLACEMENT	LF	[Symbol]	A307

ID CODE	DETERIORATION ITEM	UNIT	SYMBOL	DRAWING
LTL 02	STEEL LINTEL REPLACEMENT	LF	[Symbol]	A308
LTL 03	STEEL LINTEL REPLACEMENT	LF	[Symbol]	A308
LTL 04	STEEL LINTEL REPLACEMENT	LF	[Symbol]	A313
MAS 01	BRICK MASONRY CRACK REPAIR	LF	[Symbol]	A309
MAS 02	LIMESTONE WINDOW MULLION REPLACEMENT	SF	[Symbol]	A310
MAS 03	BRICK MASONRY REPLACEMENT	SF	[Symbol]	A309
MAS 04	SINGLE UNIT LIMESTONE REPLACEMENT	LF	[Symbol]	A310
MAS 05	MULTI-UNIT LIMESTONE REPLACEMENT	SF	[Symbol]	A310
MAS 06	LIMESTONE/ BRICK PIER RECONSTRUCTION	VLF	[Symbol]	A311
PNT 01	BRICK POINTING: TYPICAL	SF	[Symbol]	A301
PNT 02	LIMESTONE POINTING: TYPICAL	LF	[Symbol]	A301
PNT 03	TERRA COTTA POINTING: TYPICAL	LF	[Symbol]	A301
RAI 01	ROOF MOUNTED RAILING INSTALLATION	LF	[Symbol]	A410
SIL 01	TERRA COTTA SILL REPLACEMENT	LF	[Symbol]	A304
SPN 01	SPANDREL BEAM REPAIR - 1	LF	[Symbol]	A305

ID CODE	DETERIORATION ITEM	UNIT	SYMBOL	DRAWING
SPN 02	SPANDREL BEAM REPAIR - 2	LF	[Symbol]	A306
STN 01	LIMESTONE CRACK REPAIR	LI	[Symbol]	A309
STN 02	LIMESTONE SPALL REPAIR	SI	[Symbol]	A309
TRC 01	TERRA COTTA CRACK REPAIR	LI	[Symbol]	A302
TRC 02	TERRA COTTA COATING	SI	[Symbol]	A302
TRC 03	TERRA COTTA SPALL REPAIR	SF	[Symbol]	A302
TRC 04	AUDITORIUM BUILDING - FINIAL RESTORATION	SF	[Symbol]	A302
TRC 05	MAIN BUILDING - PARAPET CORNER AND FINIAL RESTORATION	SF	[Symbol]	A303
TRC 06	CLASSROOM BUILDING - PARAPET TERRA COTTA RESTORATION 1	SF	[Symbol]	A303
TRC 07	CLASSROOM BUILDING - PARAPET TERRA COTTA RESTORATION 2	SF	[Symbol]	A303
TRC 08	MAIN BUILDING - TERRA COTTA GABLE RESTORATION	SF	[Symbol]	A303
TRC 09	MAIN BUILDING - FINIAL RESTORATION AT GABLE ENDS	SF	[Symbol]	A304
TRC 10	TERRA COTTA SINGLE UNIT REPLACEMENT	SF	[Symbol]	A304
TRC 11	MAIN BUILDING - TERRA COTTA PARAPET COPING REPLACEMENT	SF	[Symbol]	A303

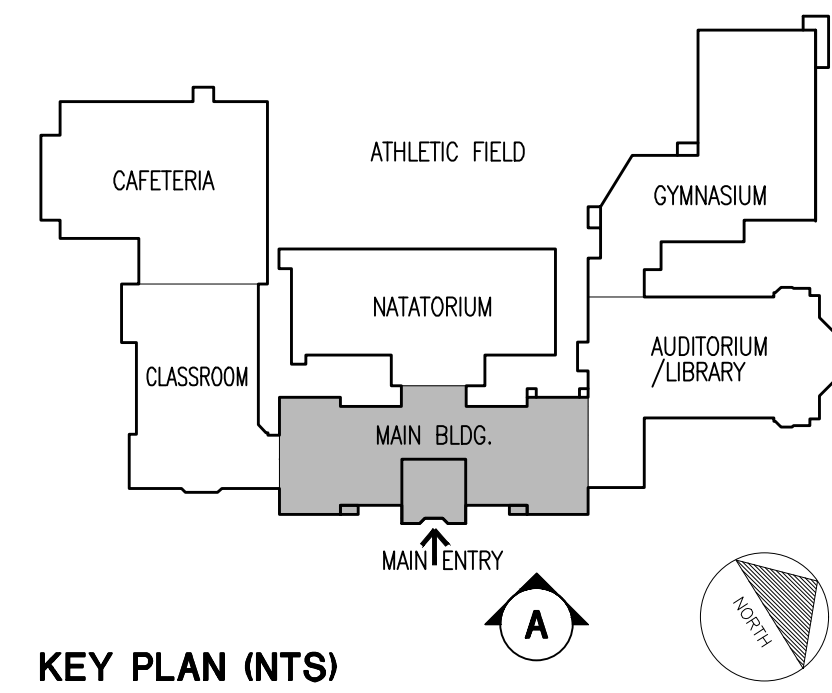

Drawing Title:  
**MAIN BUILDING EAST ELEVATION**

Drawing No.:  
**A201.00**

Sheets in Contract Set:  
23 of 132

Sheets in DOB Set:  
23 of 92